

1.3/2/3 Megapixel Remote Focus/Zoom Mini Bullet Network Camera





MS-C2163-FPN/MS-C3263-FPN/MS-C3363-FPN/
MS-C3367-FPN/MS-C3567-FPN



KEY FEATURES

- Integrated Motorized Varifocal Lens(Auto Focus)
- High-performance TI DaVinci series DSP
- H.264/MPEG-4/MJPEG video compression
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion detection
- Mounting Bracket with Cable Management for Protected Installation
- Micro SD/SDHC card local storage support
- Built-in efficient IR LEDs, IR distance up to 15m
- Built-in 802.3af Compliant PoE
- Support ONVIF/PSIA

DIMENSIONS (mm)

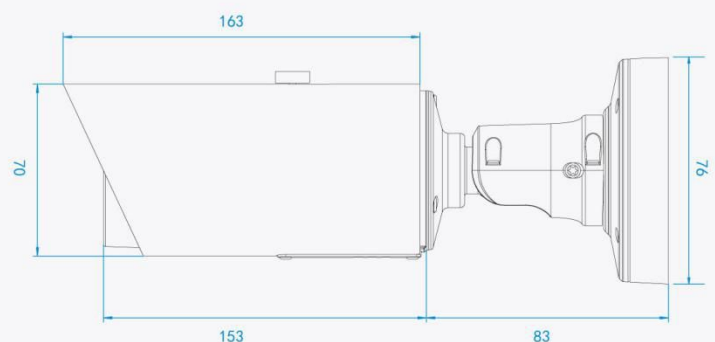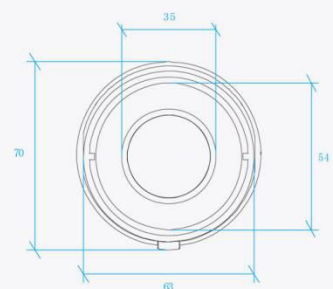

SUPPORTED BROWSERS



Firefox

IE

Chrome

Safari



	Model	MS-C2163-FPN (1.3MP)	MS-C3263-FPN (2.0MP)	MS-C3363-FPN (2.0MP)	MS-C3367-FPN (3.0MP)	MS-C3567-FPN (3.0MP)
Camera	Image Sensor	Progressive Scan CMOS	SONY Exmor CMOS	Progressive Scan CMOS		
	Min. Illumination	Color:0.1Lux@F1.2 B/W:0Lux with IR on		Color:0.2Lux@F1.2 B/W:0Lux with IR on		
	WDR	WDR		WDR-Pro		WDR
	Lens	3-10.5mm@F1.4				
	Mount	Φ14				
	Field of View	H92°- H28°	H109°- H35°	H80° - H25°	H92°- H28°	
	Shutter time	1/100000s~1/5s				
	IR Distance	Up to 15m				
	Day &Night	ICR Filter Auto Switch				
	Video	Max Image Resolution	1280×960	1920×1080		2048 ×1536
Frame rate		30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)		15fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	
Video Compression		H.264/ MPEG-4/MJPEG				
Video Bit Rate		16Kbps~16Mbps (CBR/VBR adjustable)				
Image Setting		Brightness/Contrast/ Saturation/ Sharpness				
Network	Ethernet	1RJ45 10M/100M Ethernet port				
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPNP, SIP				
System	Storage	Build-in Micro SD/SDHC card, up to 64G				
	Advanced Function	Motion detection, Privacy Masking, Backlight compensation, 3D-DNR				
	SIP/VoIP Support	Yes, Voice & Video-over-IP				
	Event Trigger	Motion detection, Network disconnect, ROI etc				
	Event Action	FTP upload/ SMTP upload/ SD card record/SIP Phone				
General	System Compatibility	ONVIF/PSIA				
	Working Temperature	-10℃ ~ 60℃				
	Working Humidity	0~90%(non-condensing)				
	Power Supply	PoE / DC12V±10%				
	Power Consumption	2.3W MAX		2.8W MAX		
		5.3W MAX (with IR on)		5.8W MAX (with IR on)		
	Housing	Up to IP67 rating for weather-resistant performance				
	Weight	820 g				
Dimensions	Φ65mm× 230 mm					
Warranty	2 years					

V5.03

