

1.3/2/3/5 Megapixel IR Mini Dome Network Camera





MS-C2182-P/MS-C2682-P/MS-C3582-P/MS-C3587-P/
MS-C3689-P



KEY FEATURES

- Compact and Stylish Design
- High-performance TI DaVinci series DSP
- H.264 /MPEG-4 /MJPEG video compression
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion detection
- Built-in Microphone
- Micro SD/SDHC card local storage support
- Built-in 802.3af Compliant PoE
- Built-in efficient IR LEDs, IR distance up to 10m
- Support ONVIF/PSIA

DIMENSIONS (mm)

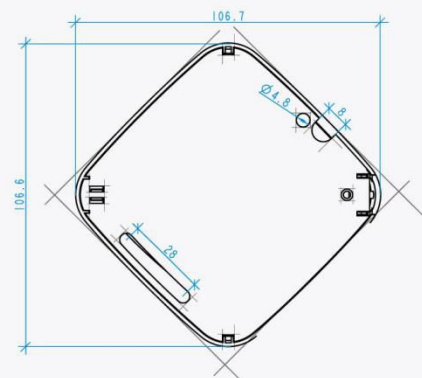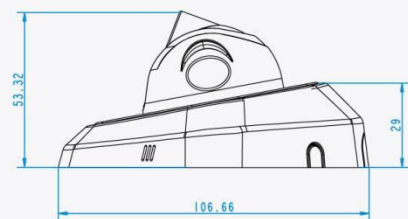

SUPPORTED BROWSERS





	Model	MS-C2182-P (1.3MP)	MS-C2682-P (1.3MP)	MS-C3582-P (2.0MP)	MS-C3587-P (3.0MP)	MS-C3689-P (5.0MP)
Camera	Image Sensor	ProgressiveScan CMOS				
	Min. Illumination	Color: 0.1Lux B/W: 0Lux	Color: 0.5Lux B/W: 0Lux	Color: 0.2Lux B/W: 0Lux with IR on		Color: 0.5Lux B/W: 0Lux with IR on
	WDR	WDR ≥60dB				
	Lens	3.6mm (2.8mm, 6mm optional) @F1.6				
	Mount	M12				
	Field of View	H84°(3.6mm)	H102° (3.6mm)	H75°(3.6mm)	H84°(3.6mm)	H102°(3.6mm)
	Shutter time	1/100000s~1/5s				
	Memory	RAM:128MB , Flash:128 MB				
	IR Distance	Smart IR, up to 10m				
	Signal Processing	DSP				
	Video	Max Image Resolution	1280×960		1920×1080	2048×1536
Frame rate		30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)		30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	20fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	8fps (2560 ×1920), 15fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)
Video Compression		H.264/ MPEG-4/MJPEG				
Video Bit Rate		16Kbps~16Mbps (CBR/VBR adjustable)				
Image Setting		Brightness/Contrast /Saturation/Sharpness				
Audio		Audio Streaming	Build-in Microphone			
	Audio Compression	G .711/AAC				
Network	Ethernet	1RJ45 10M/100M Ethernet port				
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPNP, SIP, IPv6				
System	Storage	Build-in Micro SD/SDHC card, up to 64G				
	Advanced Function	E-PTZ, Motion detection, Privacy Masking, Backlight compensation, 3D-DNR,ROI				
	SIP/VoIP Support	Yes, Voice & Video-over-IP				
	Event Trigger	Motion detection, Network disconnect, Audio trigger, Tampering Alarm etc				
	Event Action	FTP upload / SMTP upload/SD card record/ SIP Phone/ Play buzzer				
	System Compatibility	ONVIF 2.4 Profile S /PSIA				
General	Working Temperature	-10℃~60℃				
	Working Humidity	0~90%(non-condensing)				
	Power Supply	PoE 802.3af				
	Standard	CE , FCC ,RoHS				
	Power Consumption	4W MAX				
		6W MAX (with IR on)				
	Weight	150 g				
	Dimensions	85mm × 85mm × 50mm				
Warranty	2 years					

Note: E-PTZ only supports MS-C2682 and MS-C3689, under the 720P.

V6.03

