

# 1.3/2/3/5 Megapixel Mini Dome Network Camera





MS-C2181-P/MS-C2681-P/MS-C3581-P/MS-C3586-P/MS-C3688-P



## KEY FEATURES

- Compact and Stylish Design
- High-performance TI DaVinci series DSP
- H.264 /MPEG-4 /MJPEG video compression
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion detection
- Built-in Microphone
- Micro SD/SDHC card local storage support
- Built-in 802.3af Compliant PoE
- Support ONVIF/PSIA

## DIMENSIONS (mm)

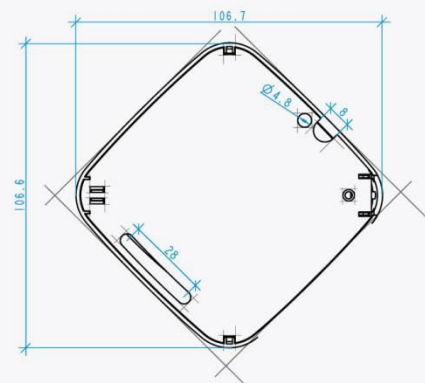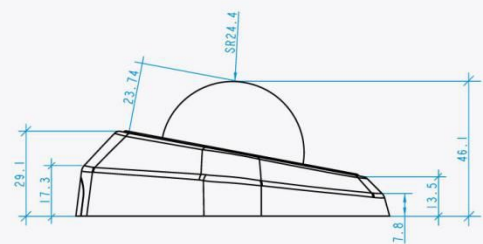

## SUPPORTED BROWSERS





	Model	MS-C2181-P (1.3MP)	MS-C2681-P (1.3MP)	MS-C3581-P (2.0MP)	MS-C3586-P (3.0MP)	MS-C3688-P (5.0MP)
Camera	Image Sensor	Progressive Scan CMOS				
	Min. Illumination	Color: 0.1Lux @F1.2 B/W:0.05Lux @F1.2	Color: 0.5Lux @F1.2 B/W:0.2Lux @F1.2	Color: 0.2Lux @F1.2 B/W: 0.1Lux @F1.2		Color: 0.5Lux @F1.2 B/W: 0.2Lux @F1.2
	WDR	WDR				
	Lens	3.6mm (2.8mm, 6mm optional) F1.6				
	Mount	M12				
	Field of View	H84°(3.6mm)	H102°	H75°(3.6mm)	H84°(3.6mm)	H102°(3.6mm)
	Shutter time	1/100000s~1/5s				
Video	Max Image Resolution	1280×960		1920×1080	2048×1536	2560 × 1920
	Frame rate	30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)		30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	20fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	8fps (2560 ×1920), 20fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)
	Video Compression	H.264/ MPEG-4/MJPEG				
	Video Bit Rate	16Kbps~16Mbps (CBR/VBR adjustable)				
	Image Setting	Brightness/Contrast /Saturation /Sharpness				
	Audio	Audio Streaming	Build-in Microphone			
Audio Compression		G .711/AAC				
Network	Ethernet	1RJ45 10M/100M Ethernet port				
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPNP, SIP				
System	Storage	Build-in Micro SD/SDHC card, up to 64G				
	Advanced Function	E-PTZ, Motion detection, Privacy Masking, Backlight compensation, 3D-DNR,ROI				
	SIP/VoIP Support	Yes, Voice & Video-over-IP				
	Event Trigger	Motion detection, Network disconnect, Audio trigger, Tampering Alarm etc				
	Event Action	FTP upload / SMTP upload/SD card record/ SIP Phone/ Play buzzer				
	System Compatibility	ONVIF/PSIA				
General	Working Temperature	-10℃~60℃				
	Working Humidity	0~90%(non-condensing)				
	Power Supply	PoE				
	Power Consumption	4W MAX				
	Weight	125 g				
	Dimensions	85mm × 85mm × 46mm				
	Warranty	2 years				

Note: E-PTZ only supports MS-C2681 and MS-C3688, under the 720P.

V6.04

